

# DC/DC Converter BK40-850SXXG2N6







## **Typical Features**

♦ Wide range input: 200-1500VDC

◆ No-load power consumption ≤0.15W


◆ Conversion efficiency (typically 81%)

◆ Switching frequency: 65KHz

◆ Protections: Short circuit, over current, over voltage protection

◆ Isolation voltage: 4000VAC

Comply with CE and RoHS certification standards

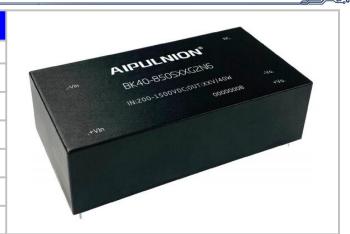

## **Application Field**

**Typical Product List** 

**BK40-850SXXG2N6** series -- It is a special high-voltage power supply designed and developed by Aipu for customers specifically for coal mine electrical customers, with regard to equipment power supply safety, convenient installation, reliable application, technological innovation and other development requirements. This series of power supplies have the advantages of global input voltage range, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, and high safety isolation.

Typiodi i Toddot Elet						
Model	Po we r	Output Voltage/Current		Max. Capacitive Load	Ripple and noise 20MHz	Efficient @800VDC (TYP.)
	( W)	Voltage	Current	(u F)	mVp-p	%
BK40-850S24G2N6		24	1667	1000	100	81
*BK40-850S28G2N6	40	28	1428	800	100	82
*BK40-850S35G2N6	10	35	1150	600	100	84
*BK40-850S37G2N6		37	1081	400	100	85

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2:."\*" is model under developing.

Note 3: The typical output efficiency is based on that product is full loaded and burned-in after half an hour.

Note 4: The fluctuation range of full load efficiency(%,TYP) is ±2%, full load output efficiency= total output power/module's input power.

Note 5:The test method of ripple and noise adopts twisted pair test method. Please refer to the following for specific test method and configuration (instructions of ripple & noise test).

	4.0		e	4.0
Inpu	II 51	oeci	пса	tion

ltem	Operating Condition	Min.	Тур.	Max.	Unit
Input Voltage Range	AC input	-	-	-	VAC
	DC input	200	800	1500	VDC

Iter	n	Operating	Min.	Тур.	Max.	Unit	
		Condition					
Input C	Input Current	200VDC	-	-	0.2		
		800VDC	-	-	0.07	Α	
Inrush c	urrent	200VDC	-	-	180		
		800VDC	-	-			
Hot s	wap	_					
Rem	ote	-		No rem	ote control term	inal	
Recommend externa		-	2A/1000VAC, must be connected				
Output Spe	cification						
lter	n	Operating Condition	Min.	Тур.	Max.	Unit	
Output Voltag	je Accuracy	Input full voltage range for any load		±2.0	±3.0	%	
Linear adjus	tment rate	Nominal load			±0.5		
Load regulation rate		Input nominal voltage 10%~100% load			±1.0		
No-load power		Input 200VDC			0.15	W	
consumption	Input 1500VDC			0.13	VV		
Minimum load		Single output	0			%	
Turn-on de	elay time	Input nominal voltage (full load)		1000		mS	
		200VDC (full load)		100			
Power off Ho	olding time	1500VDC (full load)		150		mS	
Dynamic	Overshoot range	25%-50%-25%	- 5.0		+ 5.0	%	
Response	Recovery time	50%-75%-50%	- 5.0		+ 5.0	mS	
Output ov	ershoot	Input full voltage	≤10%Vo		%		
Short circuit protection		range	Self-recovery	after the short ci	rcuit is removed	Hiccup	
Drift coe	fficient			±0.03%		%/℃	
Over cu		Input 800VDC	≥150% lo self-recovery			Hiccup	
		Input 24VDC		≤30		VDC	
0.45		Input 28VDC		≤35		VDC	
Over voltage	protection	Input 35VDC		≤45		VDC	


≤45

VDC

Input 37VDC


lte	m	Operating Condition	Min.		Тур.	Max.	Unit
Isolation Voltage	Input to output	≤5.0mA/1Min	4000				VAC
Insulation esistance	Input to output	500VDC	50				<b>M</b> Ω
Operating T	emperature		-40			+70	%0
Storage Te	mperature		-40		+85	°C	
Soldering Te	emperature	Wave-soldering			260±4℃,	time: 5~10S	
Soluening is	emperature	Manual-welding			360±8℃,	time: 4~7S	
Relative	humidity		10			90	%RH
Switching I	Frequency				65		KHz
Vibr	rate			10-55Hz,10G,30Min,alongX,Y,Z			
Securit	ty level				CLASSI		
Trouble-f	free time				MIL-HDBK-217F@25°C >300,000H		
Physical S	pecification	s					
Total p	oroject	Subproject		Testing standard Class		ss	
		Electrostatic disch	charge IEC/EN61000-4-2 Contact ±6KV		Contact ±6KV Per	f.Criteria B	
		Radiation immur	nity	II	EC/EN61000-4-3	10V/m Perf.Criteria A	
EM	/IS	Surge immunit	у	II	EC/EN61000-4-5	±2KV Perf.Criteria B	
		Pulse group immu	unity	H	EC/EN61000-4-4	±4KV Perf.Criteria B	
Conducted disturbance		immunity	unity IEC/EN61000-4-4 ±4KV Perf.Criteria B		В		
			,	/			

# **Typical Application Circuit**

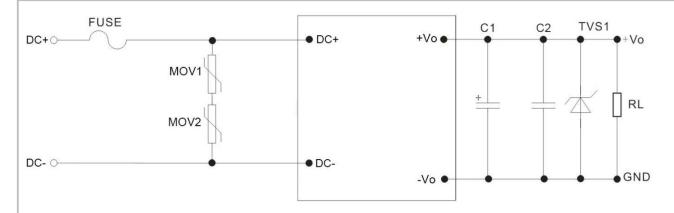


Device Tag	Device name	Recommended device value
FUSE	Fuse	2A/1000VAC, must be connected
MOV1,MOV2	Varistor	14D152K
C1	High frequency electrolytic capacitor	10uF/50V
C2	Ceramic capacitors	1uF/50V

# **EMC External Recommended Circuit**

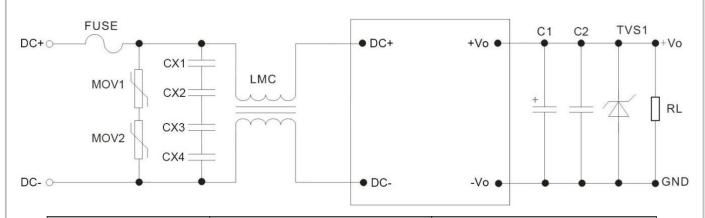

Device Tag	Device name	Recommended device value
FUSE	Fuse	2A/1000VAC, must be connected
MOV1,MOV2	Varistor	14D152K
C1	High frequency electrolytic capacitor	10uF/50V
C2	Ceramic capacitors	1uF/50V
CX1,CX2,CX3,CX4	X capacitors	104K/275VAC
LMC	Common-mode inductor	7mH/1A

# THIRD ANGLE PROJECTION THIRD ANGLE PROJECTION 127.00[5.000] 127.00[5.000] 116.84[4.600]

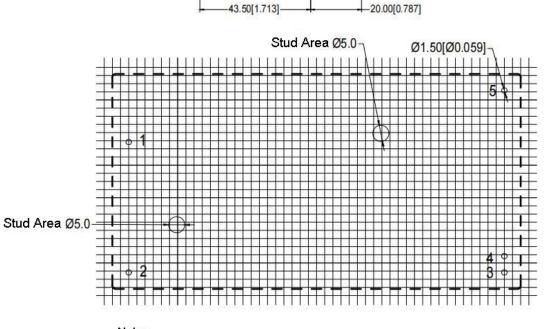

8.00±1.00[0.315]

-23.3[0.917]-

90°5°

3

5 0

# Note:

Grid distance 2.54 \* 2.54mm

Size unit: mm[inch]

Terminal diameter tolerance: ±0.10mm [±0.004inch]

Unmarked tolerance: ±1.00mm [±0.039inch]

The product must be fixed with M3 screws in the harsh vibration environment

Refer to the dimensions of the fixed holes


Pin-out	1	2	3	4	5
Single (S)	-Vin	+Vin	+Vo	-Vo	NC

Dimension		
Packing code		LxWxH
-	127.0X67.0X36.0mm	5.000X2.638X1.417inch


# Ripple& Noise Test: (Twisted Pair Method 20MHZ bandwidth)


### Test Method:

- (1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.
- (2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

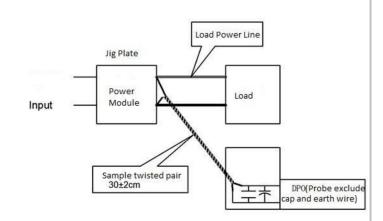

# **Product Characteristic Curve**

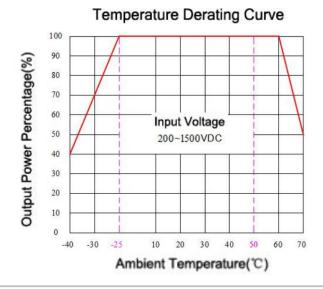

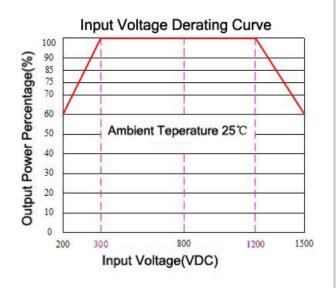

- 1: The input voltage is 200~300VDC/1200~1500VDC, and it needs to be used for voltage derating on the basis of the input voltage derating curve.
- 2. This product is suitable for use in a natural air cooling environment. If it is used in a closed environment, please contact our company.

### Note:

- 1. The product should be used under the specification range, otherwise it will cause permanent damage to it.
- 2. Product's input terminal should connect to fuse;
- 3.If the product operated below the minimum load request, we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
- 4.If the product worked beyond the load range, we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
- 5.Unless otherwise specified, data in this datasheet are tested under conditions of Ta=25°C, humidity<75% when inputting nominal voltage and outputting rated load(pure resistance load);
- 6.All index testing methods in this datasheet are based on our Company's corporate standards.
- 7.The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
- 8. We can provide customized product service;
- 9. The product specification may be changed at any time without prior notice.